

# BDJ EXTENDED BLOWING MACHINE



OUR TECHNOLOGY YOUR SUCCESS




The **BDJ Extended** is one of our most popular blowing machine. BDJ Extended is designed for blowing microcables with an extended range and a directional switch that allows cable retraction. Solid and simple construction ensures ease of use with very high durability. As standard, a mechanical counter is attached to the blowing machine.

## BLOWING RANGE:

- **MICROCABLES Ø 2.5 - 12 MM**
- **TUBES Ø 5, 7, 10, 12, 14, 16, 20 MM**

## ACCESORIES IN THE SET:

- A set of clamping sleeves for microducts and cable guides;
- A set of seals for each cable and microduct size within the scope of machine operation;
- Air hose 3/4" 10 m;
- transport box;
- Machine carrying handle;
- Calibration ball set;
- Key 13 for closing the head;
- Key 5 for closing the head;
- Prelube 5000 - lubricant;
- Head position calibration plates;
- Oil for air motors - sample;
- Instruction.

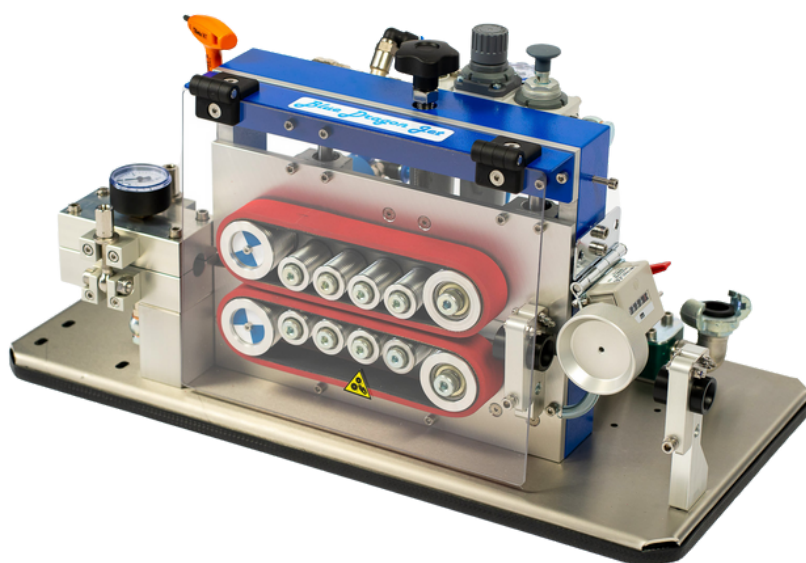

## TECHNICAL DATA

<b>MICRO CABLE DIAMETER</b>	2.5 – 12 mm
<b>MICRO TUBE DIAMETER</b>	5, 7, 10, 12, 14, 16, 20 mm
<b>BLOWING DISTANCE / MAX</b>	2500 m
<b>BLOWING SPEED / MAX</b>	110 m/min
<b>WORK PRESSURE / MAX</b>	15 bar
<b>DIMENSIONS OF THE UNIT (LXWXH)</b>	580 x 300 x 320 mm weight approx. 20 kg
<b>DIMENSIONS OF THE TRANSPORT BOX</b>	640 x 390 x 410 mm weight approx. 33 kg
<b>AVAILABLE ACCESSORIES</b>	<ul style="list-style-type: none"><li>• lubricant PRELUBE 5000 (240 ml)</li><li>• pneumatic oil sample</li><li>• micro duct cutter</li><li>• set of bushings</li><li>• set of gaskets</li><li>• set of Allen keys</li><li>• socket wrench</li><li>• air hose</li></ul>
<b>REQUIRED COMPRESSOR'S EFFICIENCY</b>	<ul style="list-style-type: none"><li>• micro ducts up till 8 mm - 0,8 m<sup>3</sup>/min</li><li>• micro ducts 8 - 12 mm - 1,0 m<sup>3</sup>/min</li><li>• micro ducts 12-16 mm - 1,5 m<sup>3</sup>/min</li><li>• micro ducts 15-20 mm - 3,5 m<sup>3</sup>/min</li></ul>
<b>RECOMMENDED COMPRESSOR:</b>	<b>KAESER M17A, ATMOS PB82</b>

**36 MONTHS  
WARRANTY**

## EQUIPMENT

### A SET OF SEALS FOR THE CABLE

Cable seal without hole, Cable gasket: 2.5, 3.5, 4, 5, 6, 7, 8, 8.5, 9, 9.5, 10, 11, 12 mm

Gasket for microduct: 4.5, 6.5, 9.5, 11.5, 13.5, 15.5, 19.5 mm

### SET OF BUSHINGS

Sleeve fixing the tube half 2 pcs. of: 5, 7, 10, 12, 14, 16, 20 mm

Cable guiding sleeve half, 2 pcs. of: 4, 6, 8, 10 mm

### SET OF CALIBRATION BALLS

2x: 3mm, 5mm, 7mm, 8mm, 10mm

**AIR HOSE 10m 3/4"**

**MICROCABLE BLOWING LUBRICANT PRELUBE 5000 0.24L**

**PNEUMATIC OIL SAMPLE 250 ML**