




BDJ BUDGET PLUS

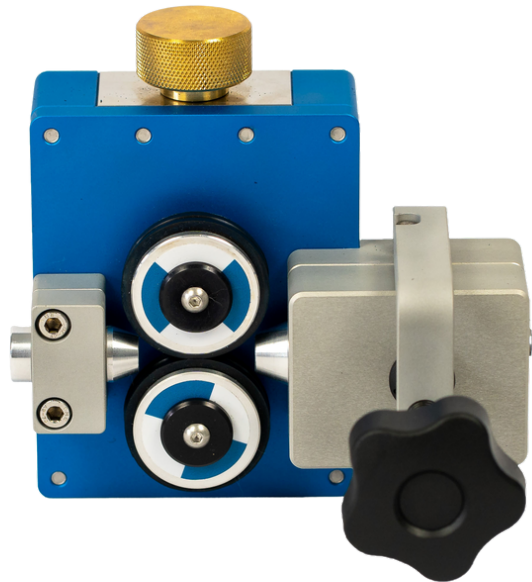


BDJ Budget Plus (with an openable blowing head)- manual unit suitable for blowing the last mile of FTTH network. With a special openable blowing head, you will be able to remove the cable from the machine without cutting it. This is especially useful when you are working with preconnected cables or you want to blow in two directions. Delivered with special bushings facilitating blowing fiber optic cables **from Ø 0,5 mm diameter.**

Blowing range:

- cable diameter Ø 0,5 - 6 mm
- duct diameter Ø 5, 7, 10 mm

Available accessories inside the set:

- Blowing head with a feeder;
- C-profile pressing the head;
- Cutter for microducts;
- Inserts for the blowing head;
- Sleeves fixing the microduct in the blowing head;
- A set of seals;
- Allen keys to operate the machine;
- Replaceable feed rollers;
- Transport box;
- Air hose with valve 10 meters;
- A set of calibrating balls.

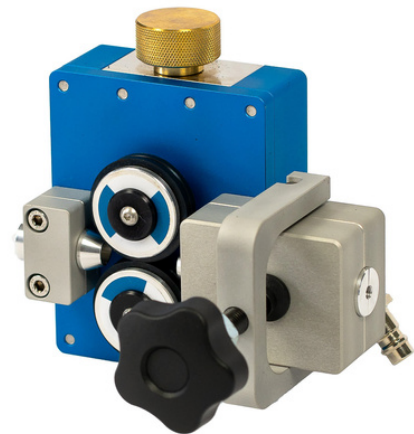

TECHNICAL DATA

MICRO CABLE DIAMETER	0,5 – 6 mm
MICRO TUBE DIAMETER	5, 7, 10 mm
BLOWING DISTANCE / MAX	700 m
BLOWING SPEED / MAX	60 m/min
WORK PRESSURE / MAX	15 bar
DIMENSIONS OF THE UNIT (L X W X H)	260 x 100 x 140mm weight approx. 2kg
DIMENSIONS OF THE TRANSPORT TRUNK	465 x 400 x 155mm weight approx. 8kg
AVAILABLE ACCESSORIES	<ul style="list-style-type: none">• micro duct cutter• set of bushings and micro duct connectors• set of gaskets• tools• spare wheels with removable rubber bands• air hose
REQUIRED COMPRESSOR'S EFFICIENCY	<ul style="list-style-type: none">• micro ducts up till 8 mm-0,8m³/min• micro ducts between 8-12 mm-1,0m³/min• micro ducts between 12-15 mm - 1,5m³/min

REQUIRED COMPRESSOR: KAESER M17A